



# VBAL-6030


## Vertical Baler

### Installation Requirements

#### Specifications


Bale Size (W x D x H)	60" x 30" x 44"
Total Chamber Capacity	124 Cubic Feet
Cycle Time	54 Seconds
Load Height (B)	53 ½"
Feed Height (C)	27 ¾"
Platen Dimensions (L x W)	58 ½" x 29 ½"
Ram Penetration	50" (14" From Bottom of Baler)
Cylinder Bore, Rod & Stroke	6" x 4" 50"
<b>Operating Pressure</b>	
Normal	1850 PSI
Maximum	2250 PSI
<b>Ram Force Rating</b>	
Normal	30.31 PSI / 53,306 Lbs
Maximum	36.86 PSI / 63,615 Lbs
Motor (HP)	10 HP
Pump (GPM)	12 GPM
Tank Capacity	20 Gallons
Shipping Weight	4,810 Lbs (approx)

All specifications are subject to change without notice

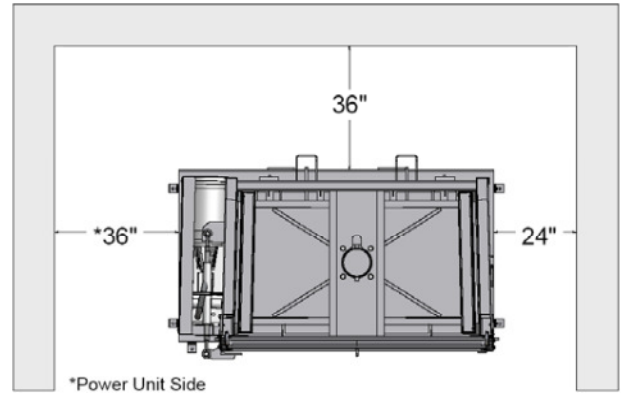

#### Electrical Disconnect Requirements

10 HP Motor		
Voltage	Amperage	Fuse
208	100	80
240	100	70
480	60	40

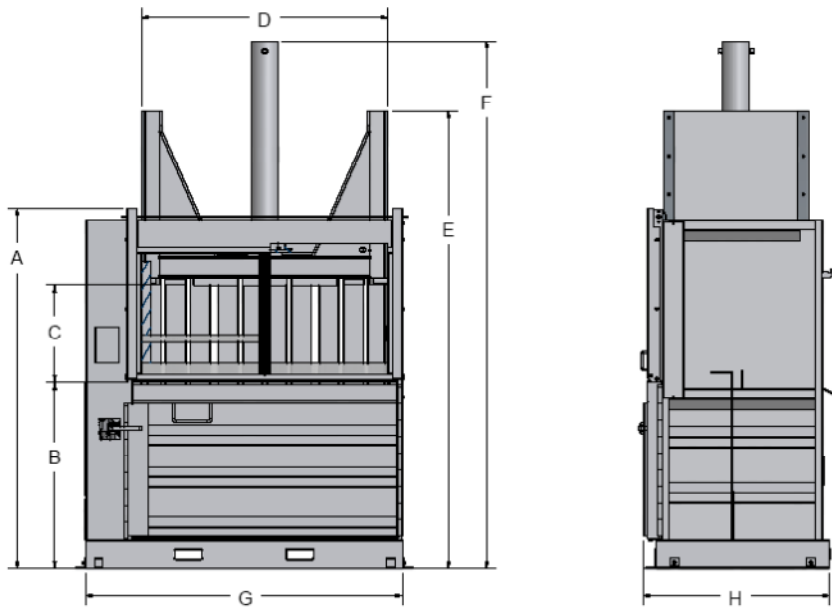

A	B	C	D	E	F	G	H	Capacity
91 ½"	53 ½"	27 ¾"	69"	119 ½"	139 ½"	79"	41 ½"	124 Cu. Ft.