




VBAL-6030LP

Vertical Baler

Installation Requirements

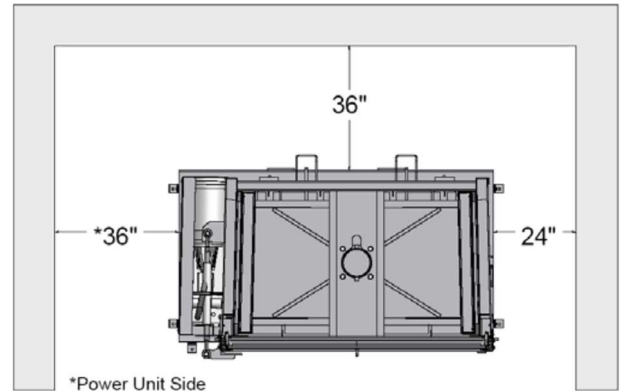


Electrical Disconnect Requirements

10 HP Motor		
Voltage	Amperage	Fuse
208	60	60 Amp
240	40	35 Amp
480	30	17.5 Amp

Specifications

Bale Size (W x D x H)	60" x 30" x 44"
Total Chamber Capacity	124 Cubic Feet
Cycle Time	47 Seconds
Load Height (B)	45 1/4"
Feed Height (C)	25"
Platen Dimensions (L x W)	60" X 30"
Ram Penetration	50" (14" From Bottom of Baler)
Cylinder Bore, Rod & Stroke	6" x 4" 50"
Operating Pressure	
Normal	1900 PSI
Maximum	2250 PSI
Ram Force Rating	
Normal	30.31 PSI / 53,306 Lbs
Maximum	36.86 PSI / 63,615 Lbs
Motor (HP)	10 HP
Pump (GPM)	13 GPM
Tank Capacity	22 Gallons
Shipping Weight	4,575 Lbs (approx)
Bale Weight	900 Lbs

All specifications are subject to change without notice

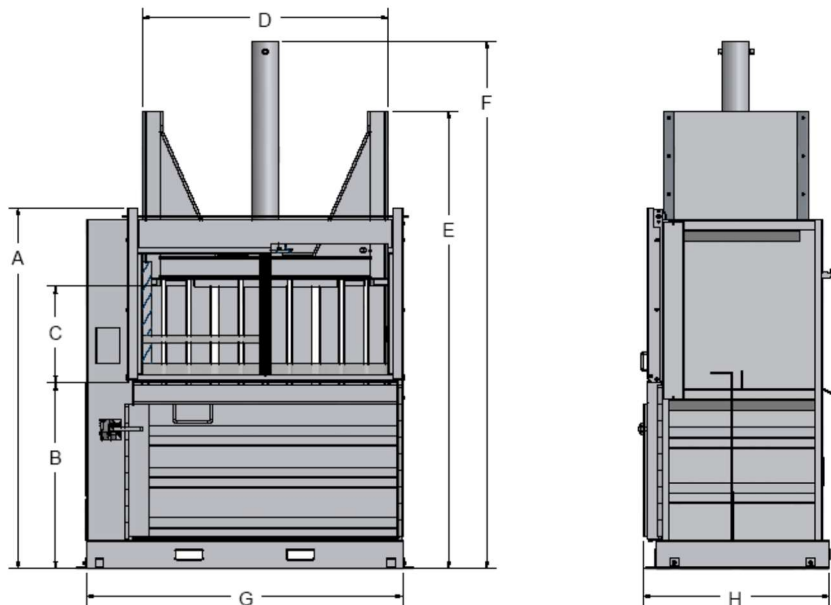

A	B	C	D	E	F	G	H	Capacity
90 1/8"	45 1/4"	25"	60"	120 1/4"	138"	81 1/2"	39 3/4"	124 Cu. Ft.